


Features

Production output	up to 2000kg/hr
Material	PE80, PE100, PE with CaCo ³ , PP-H, PP-R, PP-S
Diameter	DN/ID300mm - DN/ID5000mm
Pipe length	1-6 meters, with integrated socket and spigot
Space requirement	20m x 30m
Standards	ISO 21138, DIN 16961, DIN 16917, EN 13476 ASTM F894, NBR 7373, JIS K 6780

Main applications:

- Drainage systems
- Industrial pipes
- Irrigation systems
- Non- & low-pressure
- Water Treatment
- Outfall pipes
- Relining
- Sewage systems
- Storage
- Storm drain



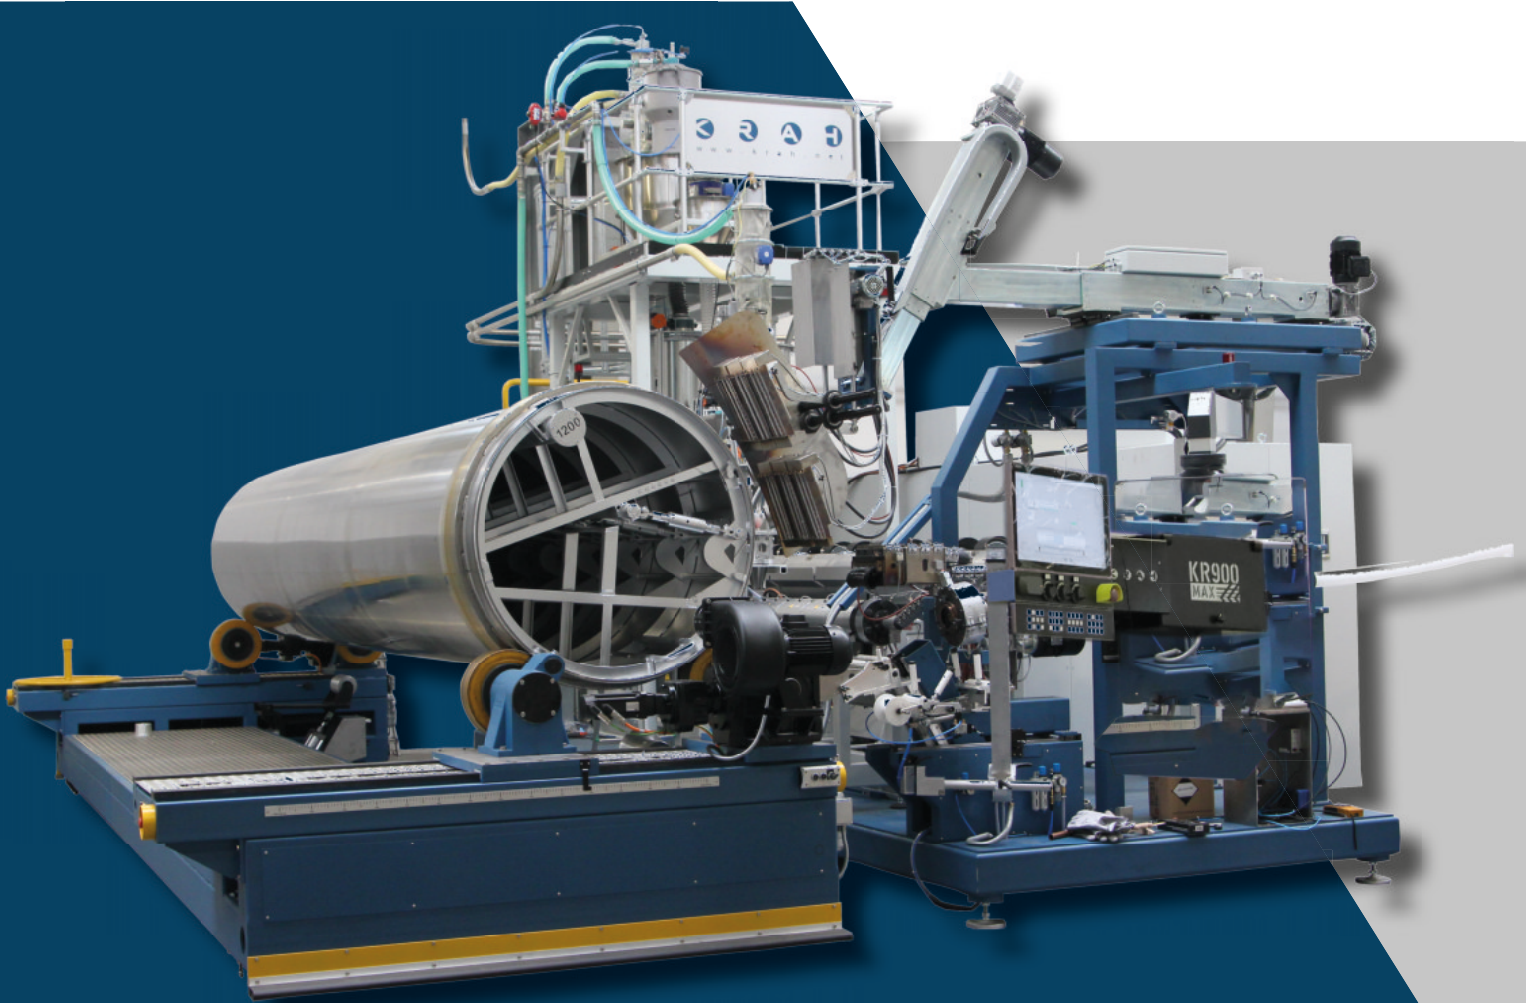

Single screw high performance helical extrusion line

Complete plastic pipe production plant to produce structured or solid wall pipes / fittings / manholes / tanks on internal diameters from DN/ID300mm up to DN/ID5000mm made out of high density PE or PP.